Satellite® P25 Series

Feature Model(s):

Satellite P25-S509

P4 2800/17.0"Wide XGA/512MB/80GB/DVD-Multi/Mdm/LAN/Wi-Fi/WinXP Home Satellite P25-S5091

P4 2800/17.0"Wide XGA/512MB/80GB/DVD-Multi/Mdm/LAN/Wi-Fi/WinXP Pro

Product Highlights

Performance

- Intel® Pentium® 4 processor with HT Technology
- 512MB of Main Memory
- 80GB* hard disk drive

Great Features

- 17.0" Wide XGA active matrix display
- NVIDIA® GeForce™ FX Go5200, 32MB DDR video memory
- DVD-Multi multi-function drive

Get On-Line

- Integrated V.92/56K modem
- Integrated 10/100 Ethernet LAN
- Integrated 802.11g Wireless LAN

System Characteristics

CPU (See CPU Performance Disclaimer)**

Intel® Pentium® 4 processor at 2.80GHz **

L2 Cache

- 512KB Level 2 Cache integrated on die
- 800MHz Processor System Bus Clock Speed (PSB) / Hyper-Threading Technology support

Memory

- 512MB DDR SDRAM (Expandable to 2048MB) (Both slots may be occupied)
- Expansion memory: 128/256/512/1024MB, 2.5V, SODIMM, PC2100 DDR SDRAM
- Data/Address Bus Width; 64-bit/32-bit
- Intel® 865PE + ICH5 Chipset

Mass Storage/Optical Drive

- Primary Hard Disk Drive: 80GB* hard disk drive, 4200rpm, Enhanced IDE (ATA-5) Interface, 9.5mm height, 0.2lbs,, Service removable
- Main Module Bay DVD-Multi: ATAPI Interface; Maximum speed (READ): CD-R(24x), CD-RW(12x), CD-ROM(24x), DVD-ROM(8x), DVD-R(8x), DVD-RW(8x), DVD-RAM(2x); Maximum speed (WRITE): CD-R(16x), CD-RW(4x), DVD-R(2x), DVD-RW(1x), DVD-RAM(2x); Compatibility: CD-ROM, CD-R (read/write), CD-RW (read/re-

write), DVD-ROM, DVD-R (read/write), DVD-RW (read/write), DVD-RAM (read/write); 12.7mm height, user removable Optional accessories: DVD-ROM, DVD/CD-RW, DVD-R/RW, DVD Multi, FDD, 2nd HDD);

2nd Module Bay: Main Battery; (Optional Accessories: DVD-ROM, DVD/CDRW, DVD Multi, DVD-R/RW, weight saver)
 Software Decoder: InterVideo® (WinDVD[™])

Graphics/Video

- **17.0**" Wide XGA TFT active-matrix display****; internal display supports up to 16M colors at 1440 x 900
- NVIDIA® GeForce™ FX Go5200 graphics controller; 32MB DDR external video memory
- Direct X 9.0 support, OpenGL support
- External Color Support/Refresh Rate: (Depending on CRT)

	appoint terresh rtate. (Depending
800 x 600;	60/70/72/75/85/100/120Hz
1024 x 768;	60/70/72/75/85/100/120Hz
1280 x 1024;	57/60/70/72/75/85/100/120Hz
1440 x 900;	60/70/72/75/85/100Hz
1600 x 1200;	60/70/72/75/85/100Hz
1680 x 1050;	60/70/72/75/85/100Hz
1920 x 1200;	60Hz
1920 x 1440;	60Hz
2048 x 1536;	60Hz

Input Devices

• **Keyboard:** Full sized 85 keys with 12 function keys, 2.7mm key

Part Numbers

PSP20U-1LKF3V

PSP20U-1LKF36

stroke, 6mm height; Dedicated Windows® & Application keys support; HotKey function; **TouchPad** pointing device.

- CD Control Function: Play/Pause, Stop/Eject, Previous,
- Skip/Next, Mode Control switch (CD/DVD/Digital Audio)
- Toshiba Console button & Instant Access Internet button
 One Touch TV-out button
- One Touch T

Expandability

2 memory slots (Both slots may be occupied)
2 PC Card slot supports 2 Type II and 1 Type III

• 2 PC Card s

- Integrated V.92/56K modem; Data and fax support
- Integrated 10/100 Ethernet LAN
- Integrated 802.11g Wireless LAN

Due to FCC limitations, speeds of 53kbps are the maximum permissible transmission rates during Download. Actual data transmission speeds will vary depending on line conditions.

Ports

- RGB (monitor) port
- Parallel port
- 4 Universal Serial Bus ports (USB 2.0)
- 2 Infrared port (1 Consumer IR port Optional Toshiba Remote Control; 1 FIR port)
- TV-Out (S-Video)
- RJ-45 LAN port
- RJ-11 modem port
- I.Link (IEEE 1394) port
- Secure Digital® (SD) card slot

Physical Description

- Dimensions (LxWxH): 16.4" x 11.5" x 1.8"
- Weight: 9.9lbs

LED Indicators: Power, HDD, 2nd HDD (common with Module Bay device), DVD/CDRW, DC-IN, Caps Lock, Arrow, Numeric, Main Battery Charging Status, System Sleep/Suspend Status, SD Card, Wireless Communication (right side)

Sound

- Realtek ALC202 Codec Chip, Software Sound
- 16-bit stereo, Windows Sound System Ver. 2.0; SoundBlaster® Pro compatible (in DOS box only)
- Built-in harman/kardon Stereo Speakers
 - Direct 3D Sound (supported by sound driver); Hardware acceleration for DirectSound and DirectMusic; Full Duplex and MIDI (play back) support
- Sound Volume (by Dial)
- Ports: External Microphone port, headphone port (stereo), Linein port

Power Supply

•	AC Adapter: 120W AC Adapter, 100-240V / 50-60Hz frequency (Universal) input voltage, 19V x 6.3A Output.
	Dimensions (LxWxH): 5.9" x 2.5" x 1.4"
	Weight: 1.38lbs
•	Battery Pack: 12-cell, rechargeable, removable Lithium Ion
	(Graphite) battery; 14.8V x 6450mAh
	Dimension (LxWxH): 5.9" x 5.1" x 0.9"
	Weight: 1.41lbs
•	Battery Saver (in WindowsXP): Stand by, HDD Auto Off, Display
-	Auto Off, Hibernation
	Battery Life: 2.0H ***
•	
	Recharge Time (Off/On): Main Battery– Up to 4Hrs/ Up to 12Hrs
	Battery life may vary depending on applications, power
	management settings and features utilized. Recharge time varies
	depending on usage. Battery may not charge while computer is
	consuming full power. After a period of time, the battery will lose
	its ability to perform at maximum capacity and will need to be
	replaced. This is normal for all batteries. To purchase a new

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change withoutnotice. Copyright 2003 TAISsatellite_P25-S509.docCreated on 9/22/2003 2:56 PMRev. 1.1Page 1 of 3

computer, visit the Toshiba website at accessories.toshiba.com.

Security

 Slot for computer lock, HDD and memory (2 screws), Built-in Modem (2 screws), Wireless LAN module (2 screws), Main Module Bay and 2nd Module Bay (both by sliding lock and sliding latch), User Power-on password, Setup Security, Keyboard Lock (by HotKey), Screen Blank (by Hotkey), Screen Saver (by software)

Bios

- ACPI, PnP, VESA, DPMS, DDC, SM BIOS, PCI BIOS support
 Operating System
 - Microsoft® Windows XP Home pre-installed (P25-S509)
 - Microsoft® Windows XP Pro pre-installed (P25-S5091)
 - Microsoft® Windows 2000 component drivers on the web

Additional Software

- Microsoft® Works
- Drag'n Drop CD+DVD Software
- InterVideo® WinDVD Creator Plus
- Toshiba Notebook Maximizer
- Intuit® Quicken® New User Edition 2003
- Norton® AntiVirus™ 2003 w/3 Month Subscription
- AOL® (3 –Month offer)

AOL OFFER DETAILS: Availability may be limited, especially during peak times. TO AVOID BEING CHARGED A MONTHLY MEMBERSHIP FEE, SIMPLY CANCEL BEFORE THE THREE-MONTH PROMOTIONAL PERIOD ENDS. Premium services carry surcharges and communication surcharges may apply, including AK, even during promotional period. Members may incur telephone charges on their phone bill, depending on their location and calling plan, even during promotional period. Available to new AOL members in the United States, age 18 or older; a major credit card or checking account is required.

- Adobe® Acrobat Reader
- AT&T® Worldnet® Service 1 Month Free

Telephone access and other charges and other terms and conditions may apply. Offer available to new customers only. Offer expires 4/30/04.

- Microsoft Internet Explorer
- Toshiba Custom Utilities
- ConfigFree™ Software
- Satellite Series Online Documentation
- Toshiba Great Software Offer: Receive your choice of two

software titles. The software selection includes titles from the follow

categories; productivity, education/reference, creativity and entertainment Warranty

• 1 year parts, labor and battery

Environmental Specifications

- Temperature: Operating: 5° to 35°C (41° to 95°F); Nonoperating: -20° to 65°C (-4° to 149°F)
- Thermal gradient: Operating: 15°C per hour maximum; Nonoperating: 20°C per hour maximum
- Relative Humidity: Operating: 20% to 80% non-condensing; Non-operating: 10% to 95% ono-condensing
- Altitude (relative to sea level): Operating: -60 to 3000 meters; Non-operating:-60 to 10,000 meters
- **Shock:** Operating: 10G; Non-operating: 60G
- Vibration: Operating: 0.5G; Non-operating: 1.0G

Product/Part Numbers

Satellite P25-S509 Satellite P25-S5091	PSP20U-1LKF3V PSP20U-1LKF36
SelectServ® W	arranty Programs
SWP-PEQQ3V	Warranty Extension to 3 Years
SWP-PEGQ3V	3 Year SystemGuard
SWP-PEQX3V	3 Year Depot Express
SWP-PEGX3V	3 Year SystemGuard + Depot Express
SWP-PEON3V	3 Year Business On-Site Repair

```
      SWP-PEQN3V
      3 Year Business On-Site Repair;

      Next Day Business Day Response

      SWP-PEGN3V
      3 Year SystemGuard + Business On Site Repair,
```

```
Next Business Day Response
```

Accessories

Selected Toshiba Accessories

PA3290U-1ACA Global AC Adapter (120W) PA3291U-1BRS Primary Battery Pack (12 cell) PA3109U-1FDD USB Floppy Disk Drive PA31331L1H40 2nd HDD 40GB	
PA3133U-1H40 2nd HDD 40GB	

PA3204U-1H60	2nd HDD 60GB
PA3230U-1H80	2nd HDD 80GB
PA3292U-1ETC	Modular Bay HDD Adapter
PA3271U-1BTM	Bluetooth SD Card II
PA3304U-1ETC	Toshiba Remote Control

SD (Secure Digital) Memory

32MB SD Card
64MB SD Card
128MB SD Card
256MB SD Card

Kingston Memory

KTT3614/128	Kingston 128MB Memory
KTT3614/256	Kingston 256MB Memory
KTT3614/512	Kingston 512MB Memory
KTT3614/1G	Kingston 1GB Memory Module

Cases PA1323U-1NCS

Toshiba Roller/BackPack (case only suitable for this notebook)

* Go to www.accessories.toshiba.com for additional, available accessories

* GB = 1 Billion Bytes

** Central Processing Unit ("CPU") Performance Disclaimer:

CPU performance in your computer product may vary from specifications under the following conditions:

- use of certain external peripheral products
- use of battery power instead of AC power
- use of certain multimedia games or videos with special effects
- use of standard telephone lines or low speed network connections
- use of complex modeling software, such as high end computer aided design applications
- use of computer in areas with low air pressure (high altitude >1,000 meters or >3,280 feet above sea level)
- use of computer at temperatures outside the range of 5°C to 35°C (41°F to 95° F) or >25°C (77°F) at high altitude (all temperature references are approximate).

CPU performance may also vary from specifications due to design configuration.

Under some conditions, your computer product may automatically shutdown. This is a normal protective feature designed to reduce the risk of lost data or damage to the product when used outside recommended conditions. To avoid risk of lost data, always make back-up copies of data by periodically storing it on an external storage medium. For optimum performance, use your computer product only under recommended conditions. Read additional restrictions under "Environmental Conditions" in your product Resource Guide. Contact Toshiba Technical Service and Support for more information.

**** **TFT Display Disclaimer:** Small bright dots may appear on your TFT display when you turn on your PC. Your display contains an extremely large number of thin-filmtransistors (TFT) and is manufactured using high-precision technology. Any small bright dots that may appear on your display are an intrinsic characteristic of the TFT manufacturing technology.

Return Policy

TAIS does not accept the return of component parts, or bundled software, which have been removed from the PC system. Pro-rata refunds on individual PC components or bundled software, including the operating system, will not be granted. If you wish to return a complete PC system, contact the TAIS dealer where you purchased the product, and comply with the dealer's standard return policies and procedures.

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2003 TAIS satellite_P25-S509.doc Created on 9/22/2003 2:56 PM Rev. 1.1 Page 2 of 3

*** Business Winstone® 2002 BatteryMark™ Version 1.0

These models achieved the battery life times shown using Ziff Davis Media Inc.'s Business Winstone® 2002 BatteryMark[™] Version 1.0. These tests were performed without independent verification by the VeriTest testing division of Lionbridge Technologies, Inc. ("VeriTest"). Neither Ziff Davis Media Inc. nor VeriTest makes any representations or warranties as to the results of the tests. Winstone® is a registered trademark and BatteryMark[™] is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. All products used in the tests were shipping versions available to the general public. The battery life results were achieved running the Business Winstone® 2002 BatteryMark[™] Version 1.0 on the following system parameters. System parameters were set according to Ziff Davis Media Inc.'s recommendations.

"Business Winstone 2002 BatteryMark Version 1.0" Score

P42.8G(800MHz) w/HT,17"WXGA,256MB+256MB,60GB(4200rpm),DVD-R/-RW,1394/FIR,802.11b(Agere), No BT Antenna, NNVIDA(32MB), 12cell, harman/kardon, WinXP

Battery Life	Battery Life Catalog Spec (1st)	
	(1st+2nd)	-
	Number of Conditioning Phase	1
	Life Test Run	2


A CPU Name			Intel® Pentium®4 Processer
	Processor info	speed	2.8GHz
		number of processors	1
	amount of RAM		512MB
	Amount of secondary RAM cache		512KB

В	Battery	type(1st)	Li-Ion
			14.8Vx6450mAh(12cell)
		model number(1st)	PA3291U-1BAS/1BRS
		type(2nd)	-
			-
		model number(2nd)	-
		number of batteries	1st=1 , 2nd=0


С	Graphics	NVIDIA GeForce FX Go5200
	amount and type of RAM	32MB
		DDR
	graphics driver name and version	nVIDIA Display Driver
	graphics resolution and color depth, refresh rate	17"Wide 1440x900/32bit/60Hz

D	hard disk capacity	60GB (4200rpm)
	hard disk file system & transfer mode+C15	Enhanced IDE(ATA-5)
	hard disk controller model	Intel® 82801EBM
	size of hardware cache if any	-
E	operating system version, service pack	Windows XP Professional Sevice Pack 1
	other special conditions	N/A


Front with display open

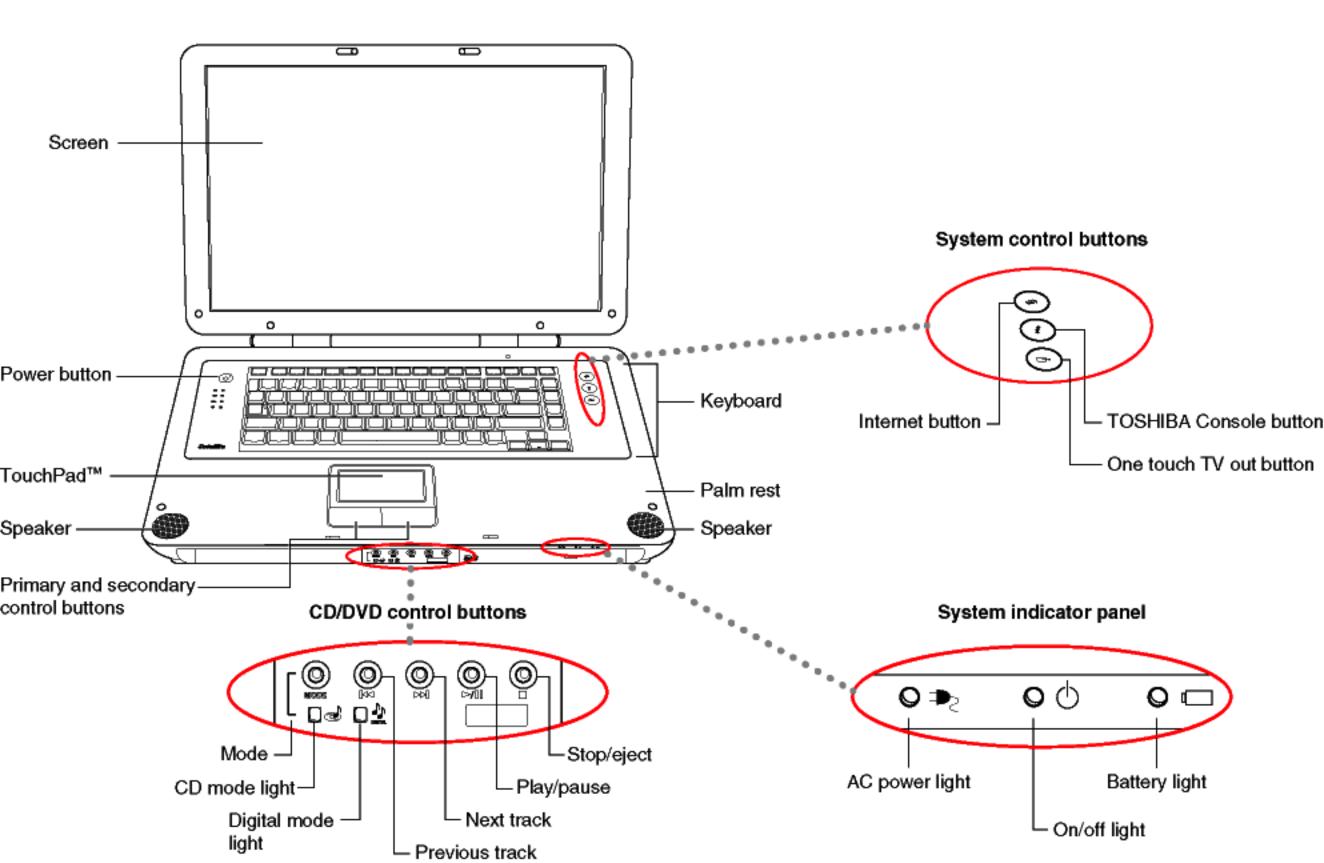


Front with display closed

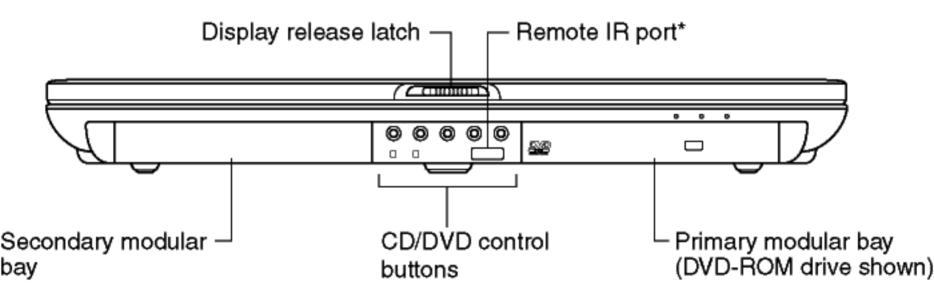


*Functional only on systems with Toshiba remote control.

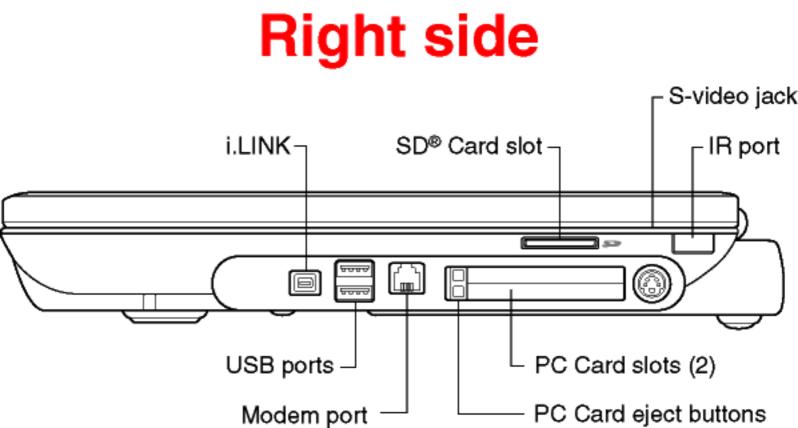




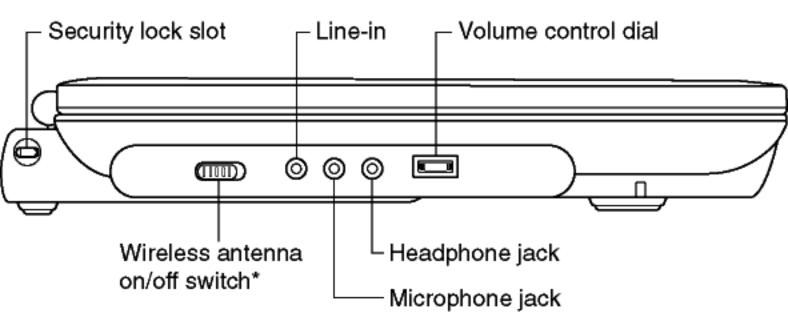



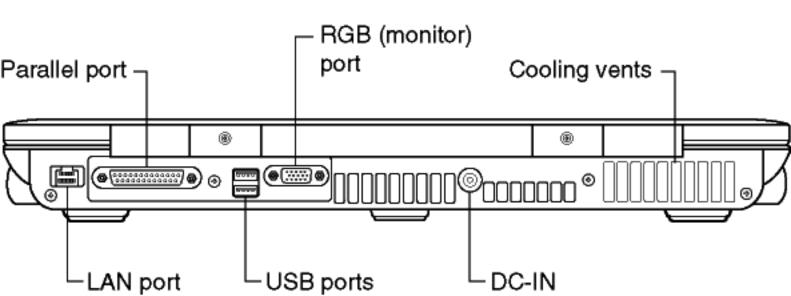

Underside

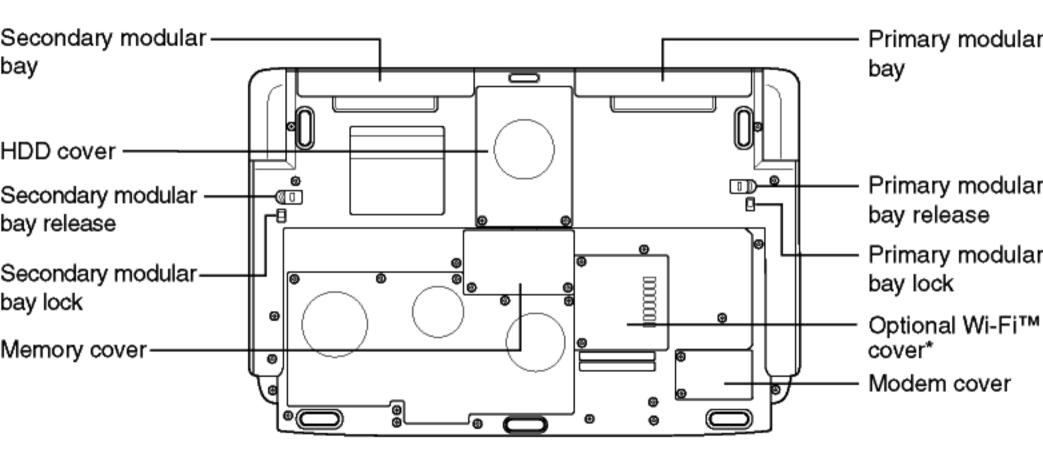

Satellite[®] P25 Series

Feature Model(s):

Satellite P25-S609

P4 3000/17.0"Wide XGA/1024MB/80GB/DVD-Multi/Mdm/LAN/Wi-Fi/WinXP Media Center Edition

Product Highlights

Performance

- Intel® Pentium® 4 processor with HT Technology
- 1024MB of Main Memory
- 80GB* hard disk drive

Great Features

- 17.0" Wide XGA active matrix display
- NVIDIA® GeForce™ FX Go5200, 64MB DDR video memory
- DVD-Multi multi-function drive

Get On-Line

- Integrated V.92/56K modem
- Integrated 10/100 Ethernet LAN
- Integrated 802.11a/g Wireless LAN

System Characteristics

CPU (See CPU Performance Disclaimer**)

Intel® Pentium® 4 processor at 3.00GHz **

L2 Cache

- 512KB Level 2 Cache integrated on die
- 800MHz Processor System Bus Clock Speed (PSB) / Hyper-•
- Threading Technology support

Memory

- 1024MB DDR SDRAM (Expandable to 2048MB) (Both slots may be occupied)
- Expansion memory: 256/512/1024MB, 2.5V, SODIMM, PC2100 DDR SDRAM
- Data/Address Bus Width; 64-bit/32-bit
- Intel® 865PE + ICH5 Chipset

Mass Storage/Optical Drive

- Primary Hard Disk Drive: 80GB* hard disk drive, 5400rpm, Enhanced IDE (ATA-5) Interface, 9.5mm height, 0.2lbs,, Service removable
- Main Module Bay DVD-Multi: ATAPI Interface; Maximum speed (READ): CD-R(24x), CD-RW(12x), CD-ROM(24x), DVD-ROM(8x), DVD-R(8x), DVD-RW(8x), DVD-RAM(2x); Maximum speed (WRITE): CD-R(16x), CD-RW(4x), DVD-R(2x), DVD-RW(1x), DVD-RAM(2x):

Compatibility: CD-ROM, CD-R (read/write), CD-RW (read/rewrite), DVD-ROM. DVD-R (read/write), DVD-RW (read/write),

DVD-RAM (read/write); 12.7mm height, user removable

- Optional accessories: DVD-ROM, DVD/CD-RW, DVD-R/RW, DVD Multi, FDD, 2nd HDD)
- 2nd Module Bay: TV-Tuner; (Optional Accessories: Main Battery, DVD-ROM, DVD/CDRW, DVD Multi, DVD-R/RW, weight saver)
- Software Decoder: InterVideo® (WinDVD™)

Graphics/Video

- 17.0" Wide XGA TFT active-matrix display****; internal display supports up to 16M colors at 1440 x 900
- NVIDIA® GeForce™ FX Go5200 graphics controller; 64MB DDR external video memory
- Direct X 9.0 support, OpenGL support
- External Color Support/Refresh Rate: (Depending on CRT) 60/70/72/75/85/100/120Hz 800 x 600;
 - 1024 x 768: 60/70/72/75/85/100/120Hz
 - 1280 x 1024; 57/60/70/72/75/85/100/120Hz
 - 1440 x 900: 60/70/72/75/85/100Hz
 - 1600 x 1200; 60/70/72/75/85/100Hz
 - 1680 x 1050; 60/70/72/75/85/100Hz
 - 1920 x 1200; 60Hz
 - 1920 x 1440: 60Hz 2048 x 1536; 60Hz

Input Devices

- Keyboard: Full sized 85 keys with 12 function keys, 2.7mm key stroke, 6mm height; Dedicated Windows® & Application keys support; HotKey function; TouchPad pointing device.
- CD Control Function: Play/Pause, Stop/Eject, Previous, Skip/Next,

Part Number

PSP20U-19PS8R

- Mode Control switch (CD/DVD/Digital Audio)
- **Remote Control for Media Center Edition**
- Toshiba Console button & Instant Access Internet button • •
 - One Touch TV-out button

Expandability

- 2 memory slots (Both slots may be occupied)
- 2 PC Card slot supports 2 Type II and 1 Type III

Communications

- Integrated V.92/56K modem; Data and fax support •
- Integrated 10/100 Ethernet LAN
- Integrated 802.11a/g Wireless LAN •

Due to FCC limitations, speeds of 53kbps are the maximum permissible transmission rates during Download. Actual data transmission speeds will vary depending on line conditions.

Ports

- RGB (monitor) port
- Parallel port •
- 4 Universal Serial Bus ports (USB 2.0) •
- 2 Infrared port (1 Consumer IR port Optional Toshiba Remote • Control; 1 FIR port)
- TV-Out (S-Video) •
- **RJ-45 LAN port** •
- RJ-11 modem port •
- I.Link (IEEE 1394) port
- Secure Digital® (SD) card slot

Physical Description

- Dimensions (LxWxH): 16.4" x 11.5" x 1.8"
- Weight: 9.9lbs

LED Indicators: Power, HDD, 2nd HDD (common with Module Bay device), DVD/CDRW, DC-IN, Caps Lock, Arrow, Numeric, Main Battery Charging Status, System Sleep/Suspend Status, SD Card, Wireless Communication (right side)

Sound

- Realtek ALC202 Codec Chip. Software Sound •
- 16-bit stereo, Windows Sound System Ver. 2.0; SoundBlaster® Pro compatible (in DOS box only)
- Built-in harman/kardon Stereo Speakers
- Direct 3D Sound (supported by sound driver); Hardware acceleration for DirectSound and DirectMusic; Full Duplex and MIDI (play back) support
- Sound Volume (by Dial) •
- Ports: External Microphone port, headphone port (stereo), Line-in port

Power Supply

- AC Adapter: 120W AC Adapter, 100-240V / 50-60Hz frequency (Universal) input voltage, 19V x 6.3A Output. Dimensions (LxWxH): 5.9" x 2.5" x 1.4" Weight: 1.38lbs
- Battery Pack: 12-cell, rechargeable, removable Lithium Ion (Graphite) battery; 14.8V x 6450mAh Dimension (LxWxH): 5.9" x 5.1" x 0.9" Weight: 1.41lbs
- Battery Saver (in WindowsXP): Stand by, HDD Auto Off, Display Auto Off, Hibernation
- Batterv Life: 1.5H ** •

Recharge Time (Off/On): Main Battery- Up to 4Hrs/ Up to 12Hrs ***Battery life may vary depending on applications, power management settings and features utilized. Recharge time varies depending on usage. Battery may not charge while computer is consuming full power. After a period of time, the battery will lose its ability to perform at maximum capacity and will need to be replaced. This is normal for all batteries. To purchase a new battery pack or see information on accessories shipping with your computer, visit the Toshiba website at www.accessories.toshiba.com Security

Slot for computer lock, HDD and memory (2 screws), Built-in Modem • (2 screws), Wireless LAN module (2 screws), Main Module Bay and

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2003 TAIS satellite_P25-S609.doc Created on 9/10/2003 9:20 AM Rev. 1.1a Page 1 of 3

2nd Module Bay (both by sliding lock and sliding latch), User Poweron password, Setup Security, Keyboard Lock (by HotKey), Screen Blank (by Hotkey), Screen Saver (by software)

Bios

ACPI, PnP, VESA, DPMS, DDC, SM BIOS, PCI BIOS support

- **Operating System**
 - Microsoft® Windows XP Media Center Edition (MCE) preinstalled
 - Microsoft® Windows 2000 component drivers on the web

This Toshiba computer uses Microsoft's Windows XP Media Center Edition (MCE) 2004 operating system and incorporates copy protection features designed to prevent unauthorized copying of copyrighted audio-visual content. Depending on certain copy protection information that is set by content owners and/or broadcasters, some content may not be available for copying or viewing using MCE on this computer.

Additional Software

- Microsoft® Works •
 - Drag'n Drop CD+DVD Software •
 - InterVideo® WinDVD Creator Plus
 - Sonic PrimeTime™
 - Toshiba Notebook Maximizer
 - Intuit® Quicken® New User Edition 2003
 - Norton® AntiVirus[™] 2003 w/3 Month Subscription
- AOL® (3 Month offer). AOL OFFER DETAILS: Availability may be limited, especially during peak times. TO AVOID BEING CHARGED A

MONTHLY MEMBERSHIP FEE, SIMPLY CANCEL BEFORE THE THREE-MONTH PROMOTIONAL PERIOD ENDS. Premium services carry surcharges and communication surcharges may apply, including AK, even during promotional period. Members may incur telephone charges on their phone bill, depending on their location and calling plan, even during promotional period. Available to new AOL members in the United States, age 18 or older; a major credit card or checking account is required.

Adobe® Acrobat Reader

AT&T® Worldnet® Service - 1 Month Free. Telephone access and other charges and other terms and conditions may apply. Offer available to new customers only. Offer expires 4/30/04.

- Microsoft Internet Explorer
- **Toshiba Custom Utilities**
- ConfigFree[™] Software ٠
- Satellite Series Online Documentation
- Toshiba Great Software Offer: Receive your choice of two

software titles. The software selection includes titles from the follow

categories; productivity, education/reference, creativity and entertainment. Warranty

• 1 year parts, labor and battery

SelectServ® Warranty Programs

SWP-PEQQ3V	Warranty Extension to 3 Years
SWP-PEGQ3V	3 Year SystemGuard
SWP-PEQX3V	3 Year Depot Express
SWP-PEGX3V	3 Year SystemGuard + Depot Express
SWP-PEQN3V	3 Year Business On-Site Repair;
	Next Day Business Day Response
SWP-PEGN3V	3 Year SystemGuard + Business On Site Repair,
	Next Business Day Response

Environmental Specifications

- Temperature: Operating: 5° to 35°C (41° to 95°F); Non-operating: -20° to 65°C (-4° to 149°F)
- Thermal gradient: Operating: 15°C per hour maximum; Nonoperating: 20°C per hour maximum
- Relative Humidity: Operating: 20% to 80% non-condensing; Nonoperating: 10% to 95% ono-condensing
- Altitude (relative to sea level): Operating: -60 to 3000 meters; Non-operating:-60 to 10,000 meters
- Shock: Operating: 10G; Non-operating: 60G
- Vibration: Operating: 0.5G; Non-operating: 1.0G

Product/Part Numbers

Satellite P25-S609 PSP20U-19PS8R

Accessories

Selected Toshiba Accessories

PA3290U-1ACA	Global AC Adapter (120W)
PA3291U-1BRS	Primary Battery Pack (12 cell)
PA3109U-1FDD	USB Floppy Disk Drive

()

SD (Secure Digital) Memory

SD-M3203B3	32MB SD Card
SD-M6403B3	64MB SD Card
SD-M1283B3	128MB SD Card
SD-M2564B3	256MB SD Card

Kingston Memory

Kingston 128MB Memory
Kingston 256MB Memory
Kingston 512MB Memory
Kingston 1GB Memory Module

Other Accessories

Go to www.accessories.toshiba.com for additional, available accessories

* GB = 1 Billion Bytes

** Central Processing Unit ("CPU") Performance Disclaimer:

CPU performance in your computer product may vary from specifications under the following conditions:

- · use of certain external peripheral products
- · use of battery power instead of AC power
- use of certain multimedia games or videos with special effects
- use of standard telephone lines or low speed network connections
- use of complex modeling software, such as high end computer aided design applications
- use of computer in areas with low air pressure (high altitude >1,000 meters or >3,280 feet above sea level)
- use of computer at temperatures outside the range of 5°C to 35°C (41°F to 95° F) or >25°C (77°F) at high altitude (all temperature references are approximate).

CPU performance may also vary from specifications due to design configuration.

Under some conditions, your computer product may automatically shutdown. This is a normal protective feature designed to reduce the risk of lost data or damage to the product when used outside recommended conditions. To avoid risk of lost data, always make back-up copies of data by periodically storing it on an external storage medium. For optimum performance, use your computer product only under recommended conditions. Read additional restrictions under "Environmental Conditions" in your product Resource Guide. Contact Toshiba Technical Service and Support for more information.

**** TFT Display Disclaimer: Small bright dots may appear on your TFT display when you turn on your PC. Your display contains an extremely large number of thin-filmtransistors (TFT) and is manufactured using high-precision technology. Any small bright dots that may appear on your display are an intrinsic characteristic of the TFT manufacturing technology.

Return Policy

TAIS does not accept the return of component parts, or bundled software, which have been removed from the PC system. Pro-rata refunds on individual PC components or bundled software, including the operating system, will not be granted. If you wish to return a complete PC system, contact the TAIS dealer where you purchased the product, and comply with the dealer's standard return policies and procedures.

Subject to Change

While Toshiba has made very effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system/component/options availability are all subject to change without notice. For the most up-to-date product information about your computer, or to stay current with the various computer software or hardware options, visit Toshiba's Web site at pcsupport.toshiba.com.

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2003 TAIS satellite_P25-S609.doc Created on 9/10/2003 9:20 AM Rev. 1.1a Page 2 of 3

*** Business Winstone® 2002 BatteryMark[™] Version 1.0 These models achieved the battery life times shown using Ziff Davis Media Inc.'s Business Winstone® 2002 BatteryMark[™] Version 1.0. These tests were performed without independent verification by the VeriTest testing division of Lionbridge Technologies, Inc. ("VeriTest"). Neither Ziff Davis Media Inc. nor VeriTest makes any representations or warranties as to the results of the tests. Winstone® is a registered trademark and BatteryMark™ is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. All products used in the tests were shipping versions available to the general public. The battery life results were achieved running the Business Winstone® 2002 BatteryMark™ Version 1.0 on the following system parameters. System parameters were set according to Ziff Davis Media Inc.'s recommendations.

Battery Life	Catalog Spec (1st)	1.50H
	(1st+2nd)	-
	Number of Conditioning Phase	1
	Life Test Run	2

А	CPU Name		Intel® Pentium®4 Processer
	Processor info	speed	3.0GHz
		number of processors	1
	amount of RAM		512MB
	Amount of secondary RAM cache		512KB


В	Battery	type(1st)	Li-lon
			14.8Vx6450mAh(12cell)
		model number(1st)	PA3291U-1BAS/1BRS
		type(2nd)	-
			-
		model number(2nd)	-
		number of batteries	1st=1 , 2nd=0


С	Graphics	nVIDIA
	amount and type of RAM	64MB
		DDR
	graphics driver name and version	nVIDIA Display Driver
	graphics resolution and color depth, refresh rate	17"Wide 1440x900/32bit/60Hz

D	hard disk capacity	60GB (5400rpm)
	hard disk file system & transfer mode+C15	Enhanced IDE(ATA-5)
	hard disk controller model	Intel® 82801EBM
	size of hardware cache if any	-

Ш	operating system version, service pack	Windows XP Professional Savice Pack 1
	other special conditions	N/A


Front with display open

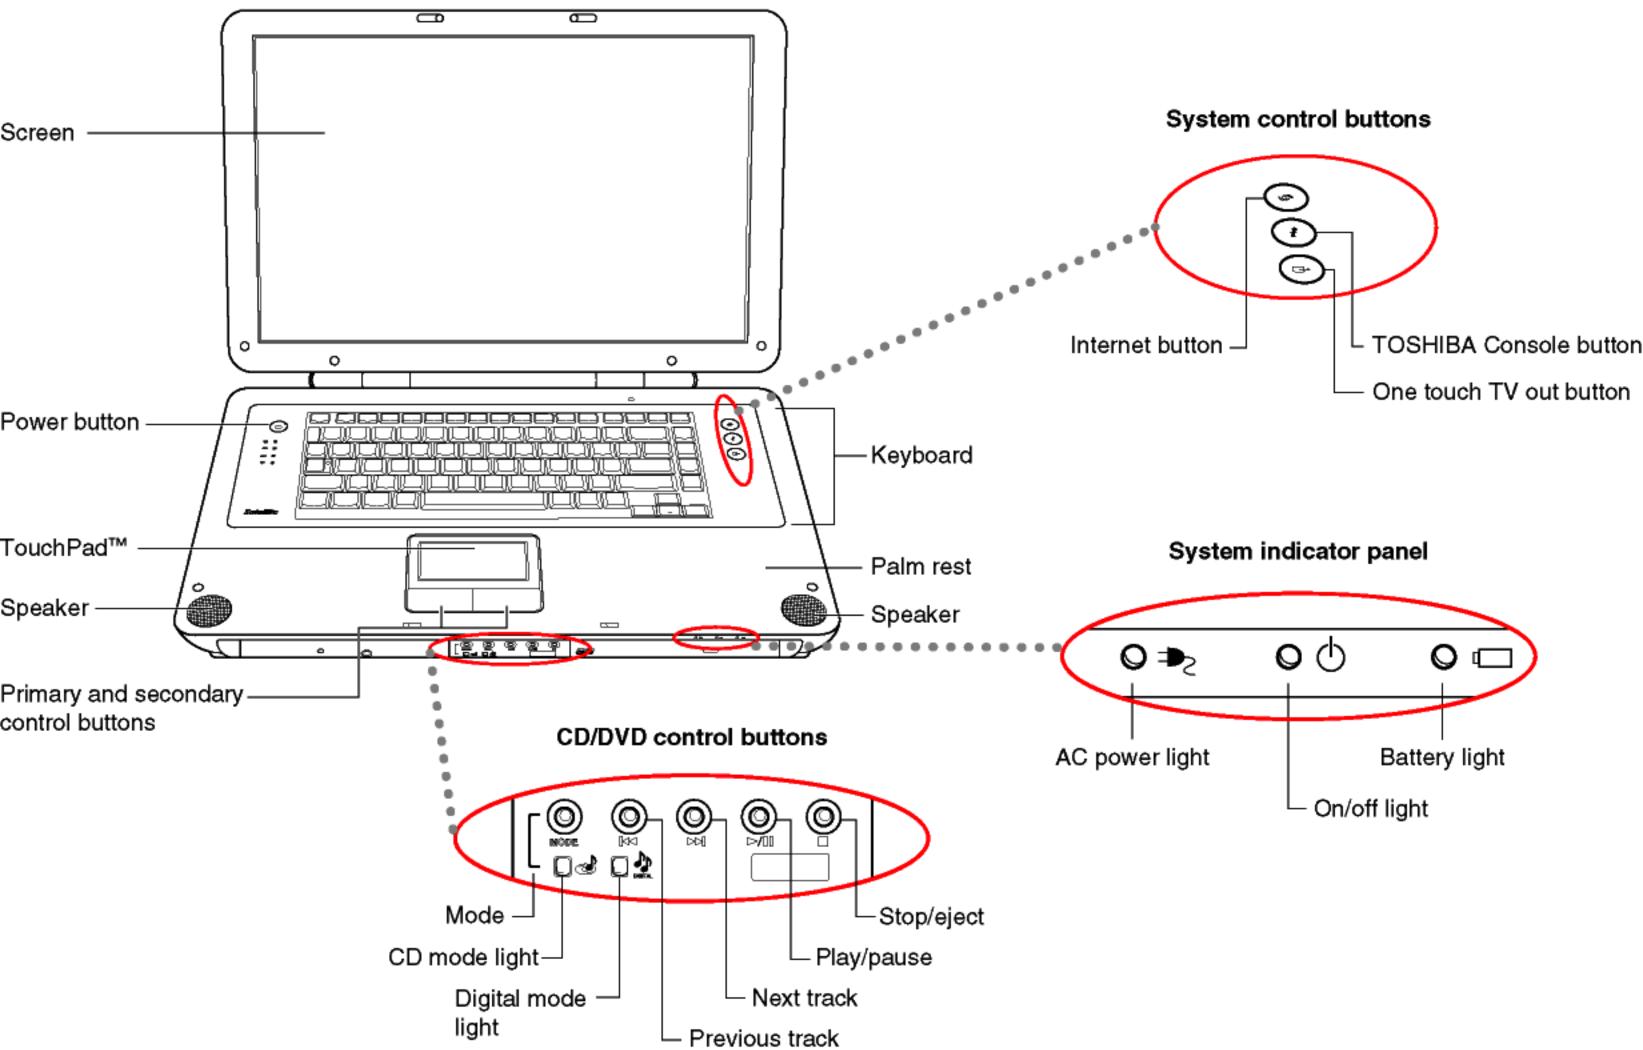


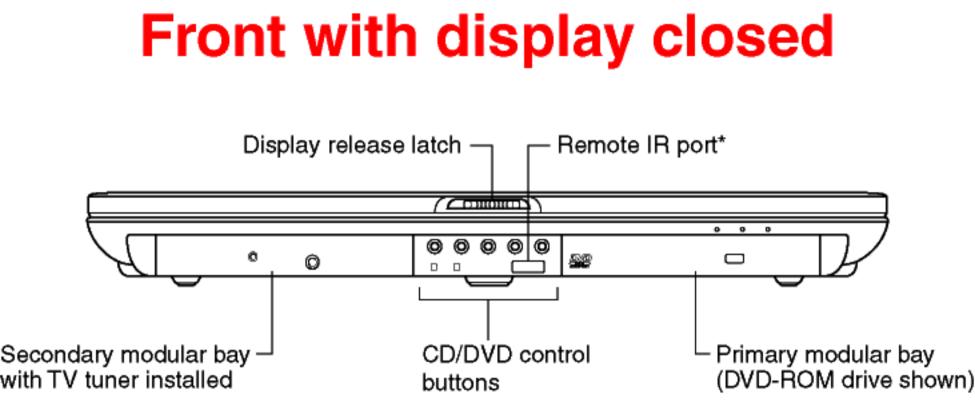


*Functional only with optional Toshiba remote control.



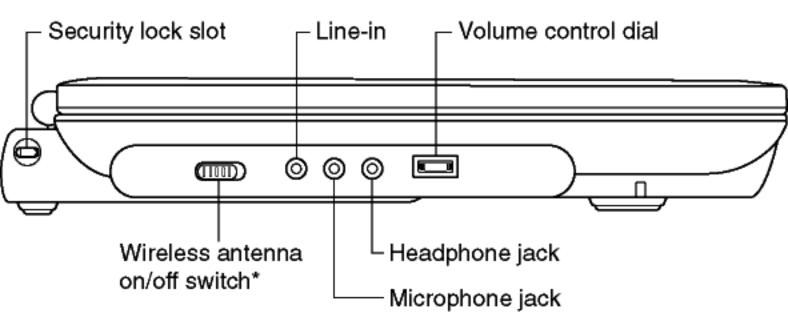

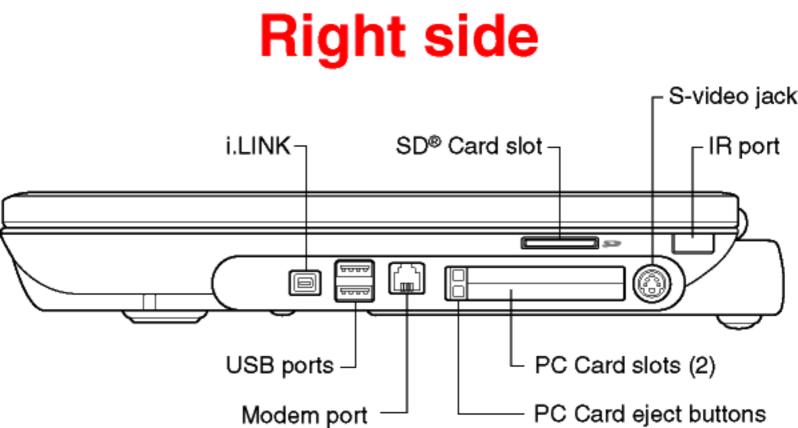



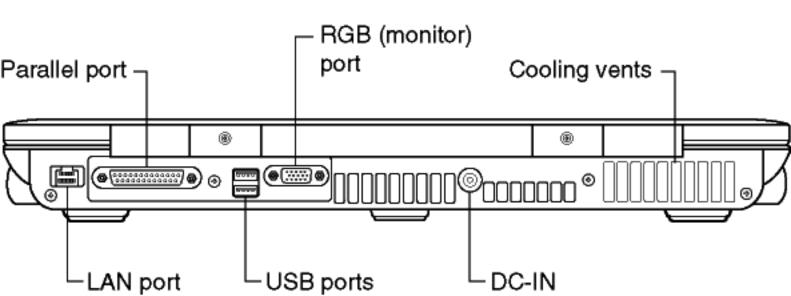

Underside

